


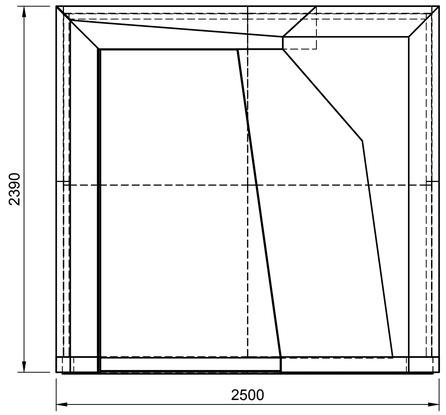
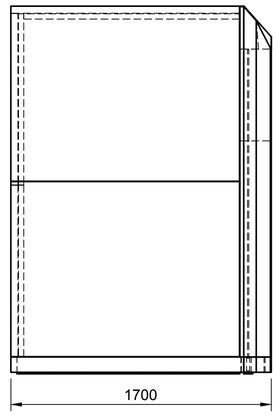


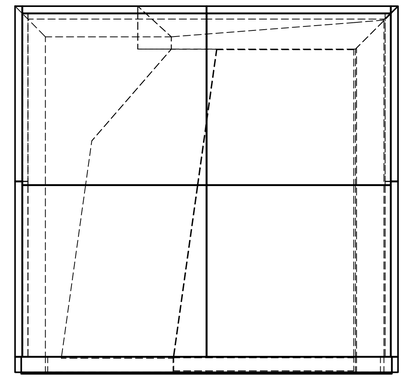

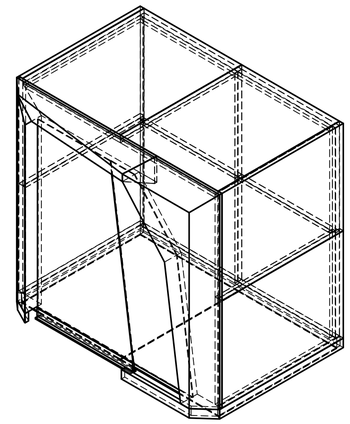

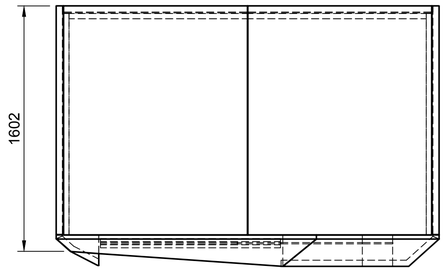


## GENERAL NOTES / GHI CHÚ CHUNG

1. Units mm. ISO first-angle projection (symbol at the title block). Pod axes (conventions s4): origin on the room floor at the pod centre, +X right seen from outside facing the door, +Y back, +Z up. Front = the door side.

2. Shown: skeleton 100000 P04 (DRAFT), envelope bodies only. Panel, lining, band and front sizes are the skeleton's named parameters; parts take them by Derive. Hardware, frames and seals are on the assembly and part drawings.

3. Overall 2500 x 1700 x 2400 (D-01, D-21: 2400 = room floor to roof skin top). Walls and ceiling 84 deep (ACP 3 + bond 3 + frame 40 + gap 4 + cassette 34). Seams 2.26 (metal stop), closing seams B1-B2, B3-B4, C1-C2 frame gap 5.5. Floor: 3 mm mat under the 9 mm ply (D-72), floor top Z 12; threshold 13.

4. Sections A-A (through the door, seen from the left) and B-B (mid depth, seen from the front) are GA sheets 2 and 3, drawn from cut copies of the skeleton.

5. Status: DRAFT, not for production. Title block fields are filled by hand (DWG No. 100000-GA, Rev. P04, scale 1:20).

| Dept. | Technical reference | Created by 31/10/26 | Approved by |
|---|---|---|---|
| | | Document type | Document status |
| | | Title 100000_P04_POD-SKELETON_CAD | DWG No. |
| | | | Rev. / Date of issue / Sheet 1/1 |